



motorola


MODELS: VERVELOOP 500 ANC
Frequency Band: 2.402-2.480GHz
Maximum RF power: 4dBm
Working temperature: 0^oC-45^oC

Product ID: SH021
Bluetooth ID: D036702
FCC ID: VLJ-SH021
IC: 4522A-SH021



Quick Start Guide


Pairing:



- Hold > for 4 seconds.
- Select "Verloop 500" from the phone Bluetooth menu.

① Fitting:

- Place the cable behind your head and adjust the cable management clip to your specific comfort and activity level.

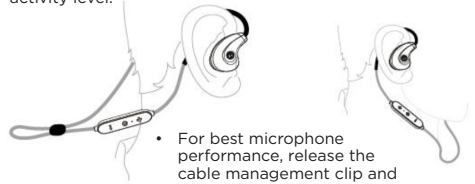


- For best microphone performance, release the cable management clip and place cable in front of head.

- To optimize the best fitting and audio experience, it is recommended to try each of the different earbud sizes.




② Button Operation:



Additional Operation	
Call	
Reject a call	Long Press - / +
Re-dial last call	Long press +
Receive incoming call and end ongoing call	Triple press MFB
Receive incoming and on hold ongoing call	Press MFB
Mute during call	Press - and +
LED Indicator	
Pairing	Red-blue flash
Standby	Blue flash
Charging	Red steady
Fully charged	Blue steady
Battery low	Red flash
ANC on	Orange steady (with 1 beep tone)
ANC off	Orange off (with 2 beep tones)

③ Charging:

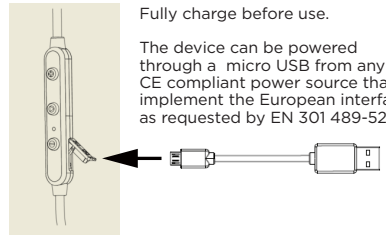

Fully charge before use.

The device can be powered through a micro USB from any CE compliant power source that implement the European interface as requested by EN 301 489-52.